



**BEAMZ**  
**MADE**  
**EAZY**

151.347 V1.1

**BT410 PAR**

**QUICK START GUIDE**

# CONTROL MENU

MENU			DESCRIPTION
MODE	ADDR	VALU	A001-Axxx
		SLAV	Stand alone mode
	AUTO	IPx	ALON (AU-A) SP_1-5
			MAST (AU-M)
	SOUN	IPx	ALON (SO-A)
			MAST (SO-M)
SET	MIC	M-xx	Microphone sensitivity
	LODA	On/Off	Reload data
	VER	V-x.x	Software version
	CALI	Code	Input password (Beamz authorization only)
		CH03-CH06	LED Temperature calibration
DMX	MOD1		DMX 22 channel mode
	MOD2		DMX 10 channel mode
REST	On/Off		Reset to factory default
NANU	rxxx	000-255	Manual control red LED
	gxxx	000-255	Manual control green LED
	bxxx	000-255	Manual control blue LED
	Uxxx	000-255	Manual control white LED
TEMP	Txxx		Current temperature

# REMOTE CONTROLLER

## 1. SWITCHING THE LEDS ON AND OFF

The LEDs can be switched on with the button ON and switched off with the button OFF.

## 2. ADJUST BRIGHTNESS AND SPEED

Use the buttons and to adjust the brightness for the static colours or speed in program mode.

## 3. SELECT BASIC COLOUR

R: Select red colour

G: Select green colour

B: Select blue colour

W: Select white colour

## 4. COLOUR BUTTONS

For constant lighting of all LEDs in one colour, press the corresponding colour button.


## 5. SELECTING AN INTERNAL PROGRAM

FLASH: Colour switch

STROBE: Colour strobe

FADE: Colour fade

SMOOTH: Colour switch and strobe

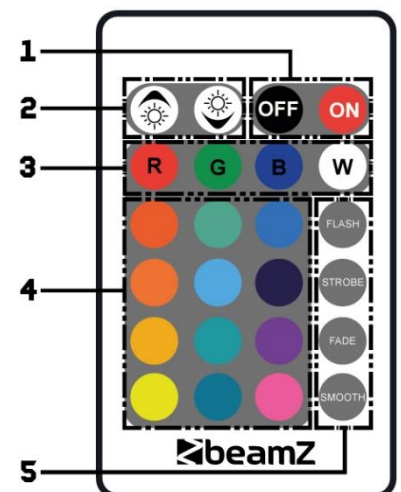

# DMX CHANNELS

## 10CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	Dimmer	000-255	Master dimmer 0-100%
2	Strobe	000-031	No function
		032-063	Full on
		064-095	Strobe effect slow to fast
		096-127	Full on
		128-159	Pulse-effect in sequences slow to fast
		160-191	Full on
		192-223	Random strobe effect slow to fast
		224-255	Full on
3	Colour	000-255	Red dimmer 0-100%
4		000-255	Green dimmer 0-100%
5		000-255	Blue dimmer 0-100%
6		000-255	White dimmer 0-100%
7		Macro Colour	000-015
	016-031		Red
	032-047		Green
	048-063		Blue
	064-079		White
	080-095		Red+Green
	096-111		Red+Blue
	112-127		Red+White
	128-143		Green+Blue
	144-159		Green+White
	160-175		Blue+White
	176-191		Red+Green+Blue
	192-207		Red+Green+Blue+White
	208-212		2700K
	.....		.....
248-255	8000K		
8	Colour Temperature	000-015	No function
		016-045	Below 3200K
		046-075	3200K - 3500K
		076-105	3500K - 5000K
		106-135	5000K - 5500K
		136-165	5500K - 6000K
		166-195	6000K - 6500K
		196-225	6500K - 7000K
		226-255	7000K - 8000K
9	Macro Run	000-015	No function
		016-031	Macro run 1
		.....	.....
		128-143	Macro run 8
		144-159	Macro sound 1
		.....	.....
240-255	Macro sound 7		
10	Macro Run Speed	000-255	Macro speed from slow to fast



# BEAMZ

**YOUR FUTURE  
YOUR SKILLS  
YOUR PLATFORM  
YOUR PARTY  
YOUR EVENT**



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.

